




PRESTO-TITE FASCIA

STONE BALLAST SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF 290 psf

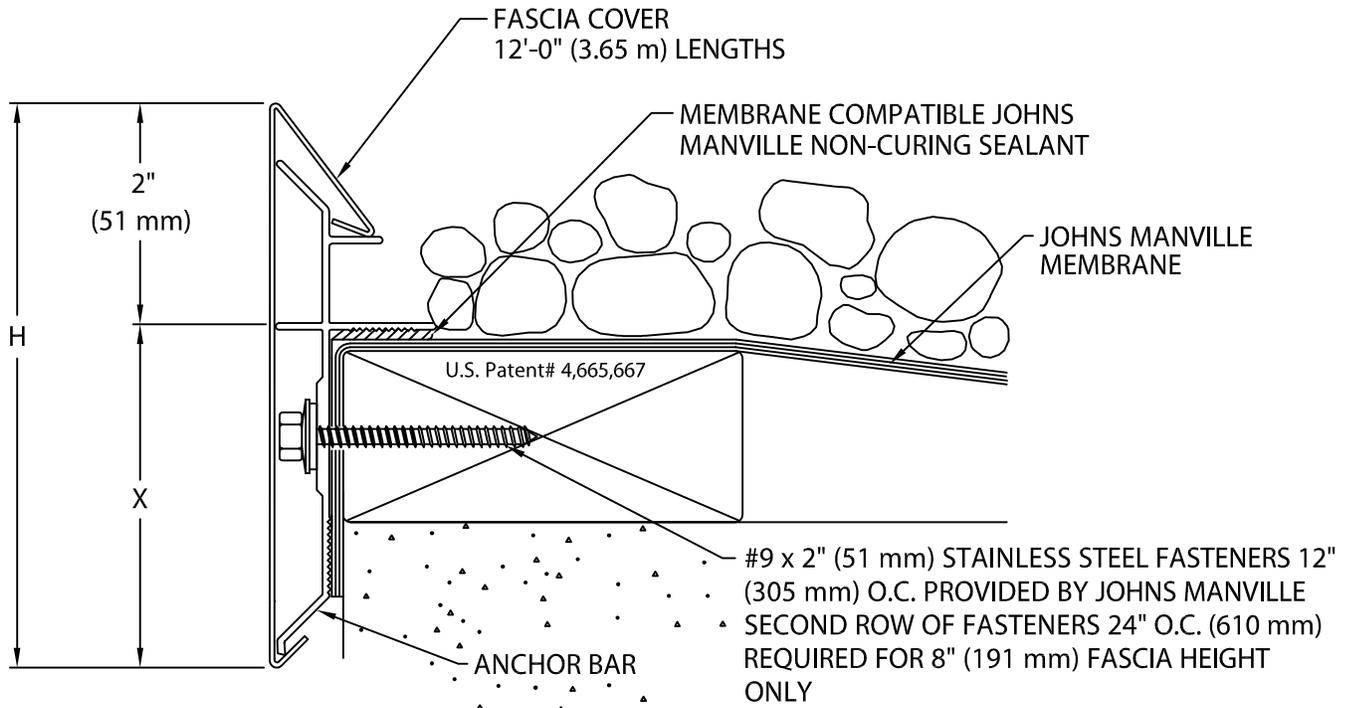

Fascia is to be installed per Specifications and Johns Manville's Installation Instructions Dwg. #16110-2118

PRESTO-TITE FASCIA DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> PFB-50	5" (127 mm)	3" (76 mm)	1 NAILER
<input type="checkbox"/> PFB-65	6 1/2" (165 mm)	4 1/2" (114 mm)	2 NAILERS
<input type="checkbox"/> PFB-80	8" (191 mm)	6" (152 mm)	3 NAILERS

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Johns Manville's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

____ 24 Ga. (.65 mm) Galv. Steel

____ .040" (1.01 mm) Aluminum

____ OTHER _____

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet 12'-0" (3.65 m) Lengths

_____ Outside Miters @ (____°)

_____ Inside Miters @ (____°)

_____ Overflow Scupper Style ____A____B

_____ Spillout Scupper Style ____A____B

_____ Downspout Scupper Style ____A____B

(____X____) Size A: Tapered 1 1/2" (38 mm) Drop
B: Flat

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

51 Lexington Street; Lewiston, ME 04240
 CUSTOMER SERVICE: 800-223-8317 USA
 800-445-1500 Canada
 TECHNICAL SERVICE: 800-445-1500 USA & Canada
 FAX: 207-784-0125
 OTHER AREAS CALL: 207-784-0123



DATE: 11/28/05

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 16010-2119

A