


# SECUREDGE 200 WELDED RADIUS GRAVEL STOP

WITH CONTINUOUS CLEAT

PROVIDING A RADIUS  
THE RADIUS MAY BE PROVIDED  
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS



OR

2.) FIELD CONDITION MEASUREMENTS


NOTE: REFER TO ATTACHED WORKSHEET  
FOR FURTHER INFORMATION

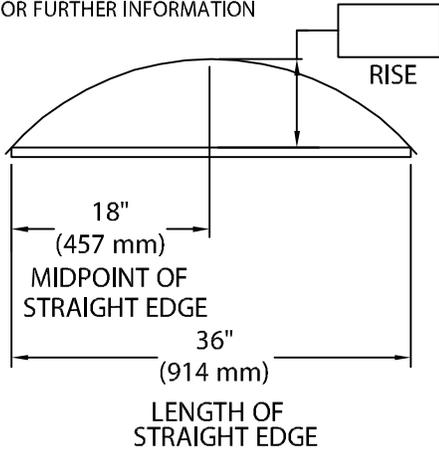

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

**IMPORTANT!!!** MUST INDICATE PROPER RADIUS CONDITION BY  
CIRCLING APPROPRIATE OUTSIDE FACE

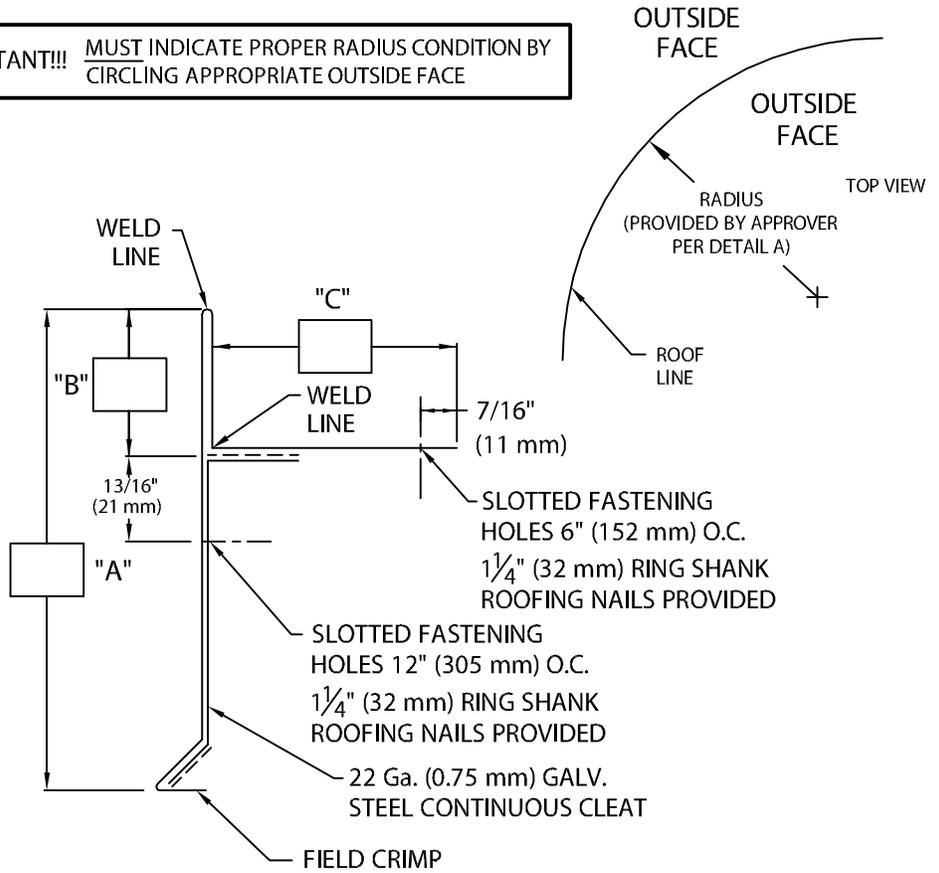

## NOTES:

--- 4" (102 mm) cover plates provided at all joints. Must be field caulked to prevent water entry.

----- INDICATES AREA TO  
BE SLIT TO FORM RADIUS

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Carlisle SynTec, Inc.'s printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## MATERIAL:

.063" (1.60 mm) Alum.

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ Lineal Feet (4'-0" (1.22 m) Lengths)

\_\_\_\_\_ Outside Miters (\_\_\_\_\_°)

\_\_\_\_\_ Inside Miters (\_\_\_\_\_°)

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

**Customer Service**  
**866-458-3537**  
**(Metal-Era)**



DATE: 01/19/12

DRN BY: JJC

CKD BY: SAK

SHT.# \_\_\_\_ OF \_\_\_\_

DWG# 15010-12987

B