




PREMIER ENVELOPE PROTECTION

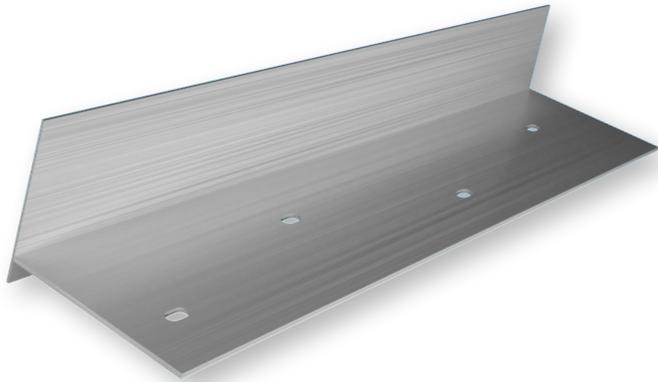

Eliminailer[®]-T Key Benefits:

- Easy and precise installation with pre-punched holes, installs up to 60% faster than wood nailers
- Made from heavy gauge extruded aluminum: will not warp, crack, spit, rot, or deform



Eliminailer-T makes using a wood nailer obsolete. The roof perimeter and corners serve as the first line of defense against severe winds, rain, hail, storms, tornados, hurricanes, and much more. If the edge fails, the entire roof system is in jeopardy.

Replacing old wood nailers at the building perimeter with Eliminailer-T significantly reduces the risk of failure and helps protect the entire roof system from costly damages and blow off.

ELIMINAILER-T AT-A-GLANCE

215 MPH Lifetime Wind Warranty

ANSI/SPRI/FM 4435/ES-1 Tested

FM and Miami-Dade Approved

Enhanced Thermal Performance


Faster Install, Less Labor

Sustainable & Non-Combustible

POWERFUL ROOF EDGE PROTECTION

ELIMINAILER-T OPTIONS	 1.5" face x 2.5" flange	 1.5" face x 5.5" flange	 3" face x 2.5" flange	 3" face x 5.5" flange	 5.2" face x 4" flange 5.2" face x 5.5" flange
MARKET SEGMENT	Metal Roof Retrofits & Low Slope New Construction and Re-roofs featuring consistent insulation height along the roof perimeter, non-tapered applications				
INSTALLATION FEATURE	Installs onto metal stud walls or existing wood nailers, if secure	Installs directly onto roof deck substrate for pre-cast, masonry, concrete & metal stud walls	Installs onto metal stud walls or existing wood nailers, if secure	Installs directly onto roof deck substrate for pre-cast, masonry, concrete & metal stud walls	Installs directly onto roof deck substrate for pre-cast, masonry, concrete & metal stud walls
INSTALLATION ADVANTAGE	Replaces 1 wood nailer & allows 1.5" of Polyiso & 1/2" cover board or up to 2" of Polyiso		Replaces 2 wood nailers & allows 3" of Polyiso & 1/2" cover board or up to 3.5" of Polyiso		Replaces 3 wood nailers & allows 5.2" of Polyiso & 1/2" cover board or up to 5.7" of Polyiso
ADDED THERMAL BENEFIT	Up to an added R-11.4 to the edge	Up to an added R-11.4 to the edge	Up to an added R-20.5 to the edge	Up to an added R-20.5 to the edge	Up to an added R-32 to the edge
STRUCTURAL BENEFIT	FM Tested: 1-990 ES-1: 1200 PSF	FM Tested: 1-990 ES-1: 1200 PSF	FM Tested: 1-990 ES-1: 1200 PSF	FM Tested: 1-990 ES-1: 1200 PSF	FM Tested: 1-990 ES-1: 1200 PSF
WARRANTY	215 MPH Lifetime Limited Wind Warranty	215 MPH Lifetime Limited Wind Warranty	215 MPH Lifetime Limited Wind Warranty	215 MPH Lifetime Limited Wind Warranty	215 MPH Lifetime Limited Wind Warranty
METAL RETROFIT APPLICATIONS	Available inverted for regular metal retrofit applications or standard configuration for metal retrofits with added insulation, pitched up to 4/12				Inverted & standard configuration, non-pitched only

COMPANION PRODUCTS

	 NEED NEW IMAGE			 NEED NEW IMAGE
Eliminailer-T 1.5"x2.5" on Existing Wood Nailer Featuring Anchor-Tite Drip Edge	Eliminailer-T 1.5"x5.5" Fastened Direct to Substrate Featuring Seal-Tite Gutter	Eliminailer-T 3"x2.5" on Existing Wood Nailer Featuring Anchor-Tite Canted Fascia	Eliminailer-T 5.2"x4" Fastened Direct to Substrate Featuring Anchor-Tite HG Fascia	Eliminailer-T 3"x5.5" Inverted for Flute Fill with Seal-Tite Gutter

* Seal-Tite Gutters, Anchor-Tite Drip Edge and Fascia are available for all sizes of Eliminailer-T.