



ELEVATE EDGEgard® + CRIMP FASCIA

SINGLE-PLY APPLICATION, RADIUS VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:


1.) THE ACTUAL KNOWN RADIUS IS



OR


2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION

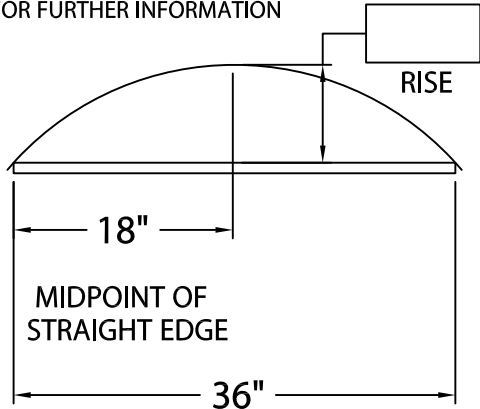

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

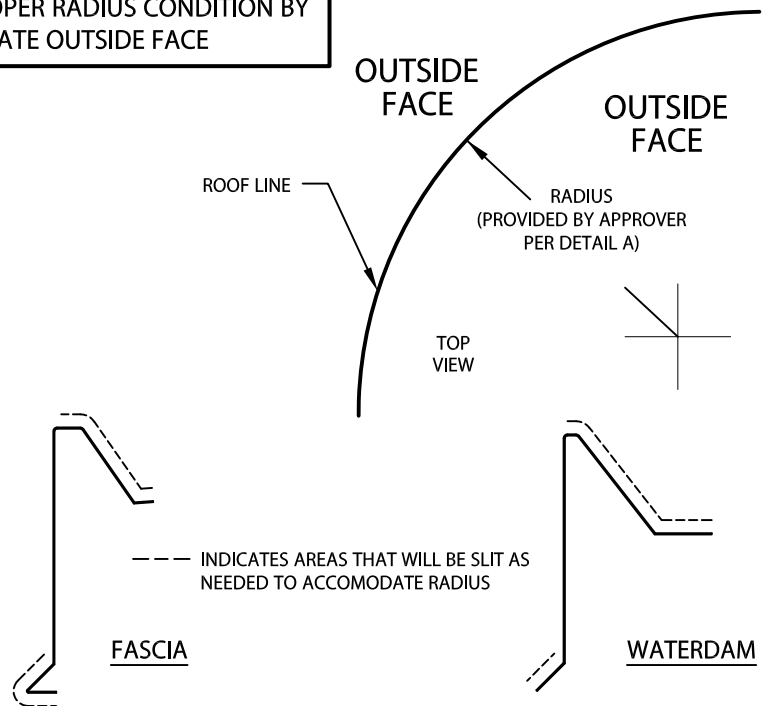

| PERMA-TITE SYSTEM 200 RADIUS FASCIA DIMENSIONS | | | |
|--|-------|-------|-----------------|
| PRODUCT ID. NO. | H DIM | X DIM | NAILER COVERAGE |
| <input type="checkbox"/> FA-50 | 5" | 3" | 1 NAILER |
| <input type="checkbox"/> FA-65 | 6.5" | 4.5" | 2 NAILERS |
| <input type="checkbox"/> FA-80 | 8" | 6" | 3 NAILERS |
| <input type="checkbox"/> FA-95 | 9.5" | 7.5" | 4 NAILERS |
| <input type="checkbox"/> FA-110 | 11" | 9" | 5 NAILERS |
| <input type="checkbox"/> FA-125 | 12.5" | 10.5" | 6 NAILERS |

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Elevate's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

*OIL CANING CAN OCCUR ON LARGER FACE HEIGHTS. RECOMMEND .050" OR .063" FOR FACE HEIGHTS ABOVE 8"

- ___ 24 GA. GALV. STEEL*
- ___ .040" ALUMINUM*
- ___ .050" ALUMINUM
- ___ .063" ALUMINUM
- ___ OTHER: _____

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



ELEVATE
26 CENTURY BLVD.
SUITE 205
NASHVILLE, TN 37214
CONTACT YOUR LOCAL ELEVATE REPRESENTATIVE

DATE: 03/16/23

DRN BY: MLM

CKD BY: MM

SHT.# _____ OF _____

DWG# 13010-16996

D