




# SEAL-TITE WR GUTTER BOX

## \*NOTES

- Bottom sizes are provided in 1/2" increments
- Maximum downspout dimension not to exceed "B" minus 9/16"
- Roof flange is optional. If flange size is not provided, the gutter will not include a roof flange. If flange angle is not provided, the gutter will have a 90-degree flange.
- Pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050 aluminum.
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI GT-1 Test Pressure up to 223 psf (Horizontal) and 136 psf (Vertical)

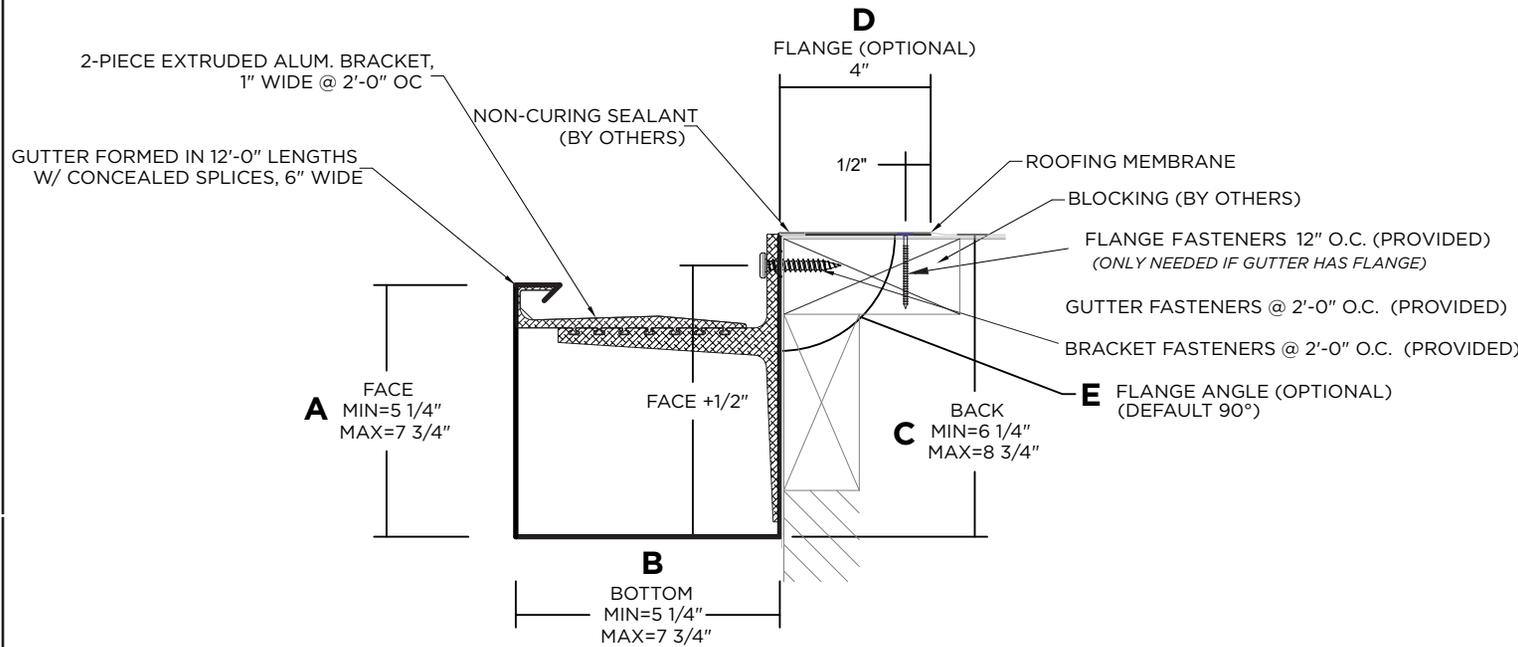

## APPROVALS\*



**ANSI/SPRI/GT-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

SHT# \_\_\_\_\_ of \_\_\_\_\_

DATE: **06/20/25**

Date: \_\_\_\_\_

**Metal-Era**  
1600 Airport Rd.  
Waukesha, WI 53188  
Phone: 800-558-2162  
www.metalera.com

DRN BY: **PL**

CKD BY: **MM**

DWG #: 11012-38912

REV: **C**

## DIMENSIONS

SELECT SIZE	A (FACE)	B (BOTTOM)	C (BACK)	FLANGE (OPTIONAL)
<input type="checkbox"/>	5 1/4"	5 1/4"	6 1/4"	<b>D (FLANGE)</b> PLEASE SELECT ONE: WITH FLANGE <input type="checkbox"/> WITHOUT FLANGE <input type="checkbox"/>
<input type="checkbox"/>	5 3/4"	5 3/4"	6 3/4"	NOTE: IF NEITHER BOX IS CHECKED, THE GUTTER WILL BE PROVIDED <b>WITHOUT</b> A ROOF FLANGE
<input type="checkbox"/>	6 1/4"	6 1/4"	7 1/4"	<b>E (FLANGE ANGLE)</b> NOTE: IF ANGLE IS NOT PROVIDED, FLANGE WILL BE 90°
<input type="checkbox"/>	6 3/4"	6 3/4"	7 3/4"	
<input type="checkbox"/>	7 1/4"	7 1/4"	8 1/4"	
<input type="checkbox"/>	7 3/4"	7 3/4"	8 3/4"	

## MATERIAL

- 24 Ga. Galv. Steel Color: \_\_\_\_\_
- 22 Ga. Galv. Steel Finish: \_\_\_\_\_
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: \_\_\_\_\_
- Substrate:  Wood  
If substrate is not given, wood fasteners will be provided.  Masonry  Metal



## QUANTITIES

- \_\_\_\_\_ Lineal Feet (12'-0" Lengths)
- \_\_\_\_\_ Outside Miter (90°)
- \_\_\_\_\_ Inside Miter (90°)
- \_\_\_\_\_ Right Endcaps
- \_\_\_\_\_ Left Endcaps
- \_\_\_\_\_ Expansion Joints (If Required)


Accessory Type\*:  Quicklock (Default)  Welded (Surcharge)

# SEAL-TITE WR GUTTER


## BOX STANDARD ACCESSORIES

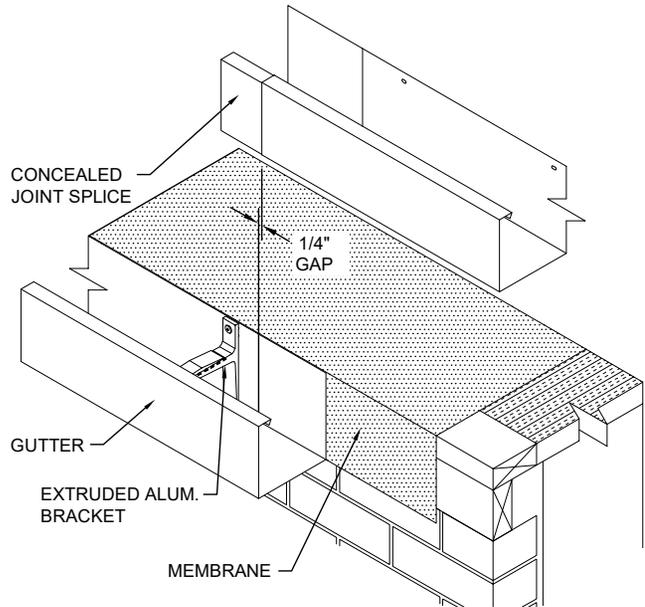


**END CAP**  
LEFT HAND SHOWN

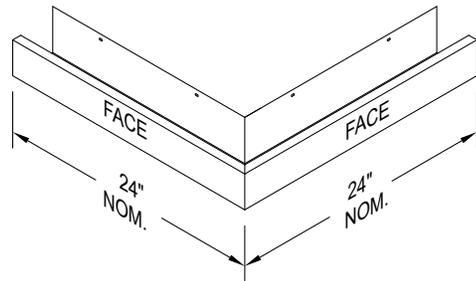

**OUTSIDE MITER**

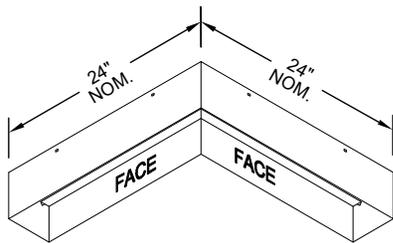

**INSIDE MITER**

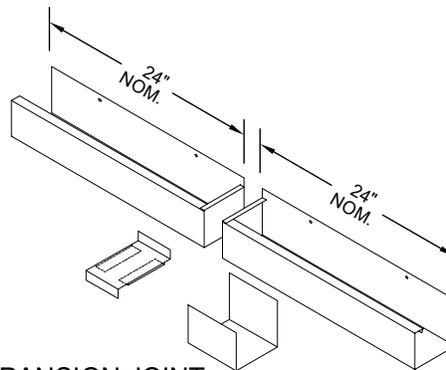

**EXPANSION JOINT**  
(IF REQUIRED)

Standard gutter miter leg lengths are 24" Nominal  
 Standard gutter miter angle is 90°  
 For special miter requirements, attach sketches or consult manufacturer for assistance.

**Metal-Era**  
 1600 Airport Rd.  
 Waukesha, WI 53188  
 Fax: 800-558-2162  
 www.metalera.com

SHT#	_____ of _____
DATE:	<b>06/20/25</b>
DRN BY:	<b>PL</b>
CKD BY:	<b>MM</b>
DWG #:	<b>11012-38912</b>
REV:	<b>C</b>