

8" WIDE CONCEALED SPLICE PLATE WITH  
FACTORY APPLIED DUAL NON-CURING  
SEALANT STRIPS AT EACH JOINT

COPING COVER  
(12'-0" LENGTHS)

12" WIDE GALV. ANCHOR CLIPS  
(SPACING DETERMINED BY FIBERTITE) ①

15/16"  
INSIDE FACE ②  
MIN. 2 1/4"  
MAX. 6"

ROOF MEMBRANE  
(BY OTHERS)

PLEASE SPECIFY SUBSTRATE:  
(IF SUBSTRATE INFORMATION IS NOT GIVEN, WOOD  
SUBSTRATE FASTENERS WILL BE PROVIDED.)

- WOOD - #10 x 1 1/2" STAINLESS STEEL FASTENERS
- MASONRY - 3/4" x 1 1/4" TAPCON FASTENERS
- METAL - 12-14 X 1" TEK 3 FASTENER

FOR FACE HEIGHTS OVER 6":  
(IF SUBSTRATE INFORMATION IS NOT GIVEN, WOOD  
SUBSTRATE FASTENERS WILL BE PROVIDED.)

- WOOD - 1 1/4" RING SHANK ROOFING NAILS
- MASONRY - 3/16" x 7/8" ZAMAC
- METAL - #10 X 1" SELF DRILLING PANCAKE SCREW

1 3/8"

COVERAGE ③  
OUTSIDE FACE  
MIN. 3"  
MAX. 12"

5/8"

3/8" SPACE PROVIDED  
FOR WALL VARIATIONS

ACTUAL WALL SIZE MIN. 3 1/2" MAX. 32"

### NOTES:

- ① ANCHOR CLIP PROFILE ON WALLS 14" AND GREATER. 
- ② IF WALL SIZE IS OVER 16", THE RISE IS 5/8".
- ③ FACE = COVERAGE (SHOULD EXTEND A MIN. OF 1" BELOW WATER RESISTANT WALL SURFACE) + 2".
- ④ 24 GA. GALV. AND .040" ALUM. COPING COVERS AVAILABLE FOR WALL SIZES 3 1/2" TO 24" ONLY.
- ⑤ WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".
- ⑥ FOR NON 90° MITERS PLEASE USE PRINT APPROVAL #23011-2480.

### MATERIAL:

\_\_\_ 24 GA. GALVANIZED STEEL ④ \_\_\_ .040" ALUMINUM ④  
\_\_\_ 22 GA. GALVANIZED STEEL \_\_\_ .050" ALUMINUM  
\_\_\_ OTHER \_\_\_\_\_ \_\_\_ .063" ALUMINUM

COLOR: \_\_\_\_\_ FINISH: \_\_\_\_\_

### QUANTITIES:

\_\_\_\_\_ LINEAL FEET 12'-0" LENGTHS

### ACCESSORIES:

\_\_\_ OUTSIDE MITERS @ 90° ⑥  
\_\_\_ INSIDE MITERS @ 90° ⑥  
\_\_\_ RIGHT ENDCAPS  
\_\_\_ LEFT ENDCAPS  
\_\_\_ RIGHT ENDWALL (COPING VERSION)  
\_\_\_ LEFT ENDWALL (COPING VERSION)  
\_\_\_ RIGHT ENDWALL (SPLICE PLATE VERSION)  
\_\_\_ LEFT ENDWALL (SPLICE PLATE VERSION)

SPECIFY ACCESSORY TYPE:  
 WELDED ⑤  
 QUICKLOCK

AUTHORIZED SIGNATURE:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_



ANSI/SPRI ES-1 TESTED

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

CUSTOMER SERVICE  
800-355-6416

DATE: 03/05/19

DRN BY: ZS

CKD BY: SAK


SHT.# \_\_\_ OF \_\_\_

DWG# 23011-19367


F



# FIBERTITE COPING

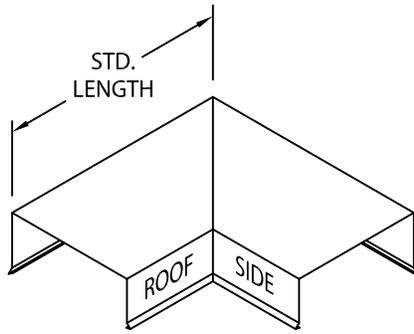


OUTSIDE MITER

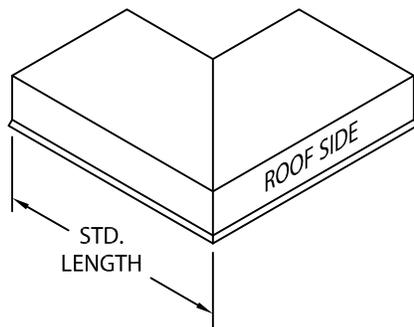


INSIDE MITER

MITER STANDARD LEG LENGTH:  
 $WALL\ SIZE + 9\frac{5}{8}'' = LENGTH$


## FIBERTITE COPING STANDARD ACCESSORIES



ENDCAP  
(LEFT HAND SHOWN)

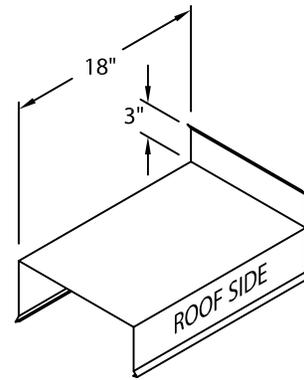

ENDWALL FLASHING  
COPING VERSION  
(RIGHT HAND SHOWN)

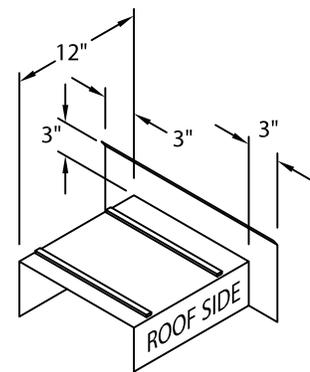

ENDWALL FLASHING  
SPLICE PLATE VERSION  
(RIGHT HAND SHOWN)  
(AVAILABLE ONLY IN  
.040" WELDED, PAINTED  
TO MATCH COPING)

## ADDITIONAL ACCESSORIES ARE AVAILABLE:

- TRANSITION MITERS
- STRAIGHT TRANSITION MITERS
- "T" MITERS
- "Z" MITERS
- STEP-UP MITERS
- PEAK / VALLEY MITERS
- PILASTER CAPS
- RADIUS COPING
- ARCHED COPING

(FOR ADDITIONAL ACCESSORY REQUIREMENTS, ATTACH SKETCHES OR CALL MANUFACTURER FOR ASSISTANCE).

## ANCHOR CLIP SPACING:

- 24 GA. / .040", 16" WALL SIZE OR LESS, ANCHOR CLIPS ARE 48" O.C.
- 24 GA. / .040", OVER 16" WALL SIZE, ANCHOR CLIPS ARE 36" O.C.
- 22 GA. / .050" / .063", 26½" WALL SIZE OR LESS, ANCHOR CLIPS ARE 48" O.C.
- 22 GA. / .050" / .063", OVER 26½" WALL SIZE, ANCHOR CLIPS ARE 36" O.C.
- FLORIDA JOBS HAVE ANCHOR CLIPS 36" O.C. FOR ALL WALL SIZES.

ANCHOR CLIP MATERIAL IS 20 GA. GALV. FOR ALL WALL SIZES UP TO 26½".  
 16 GA. GALV. FOR ALL WALL SIZES GREATER THAN 26½"

CUSTOMER SERVICE 800-355-6416	DATE: 03/05/19	SHT.# ___ OF ___	
	DRN BY: ZS	DWG# 23011-19367	
	CKD BY: SAK		